

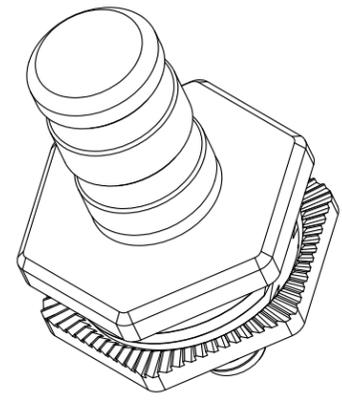
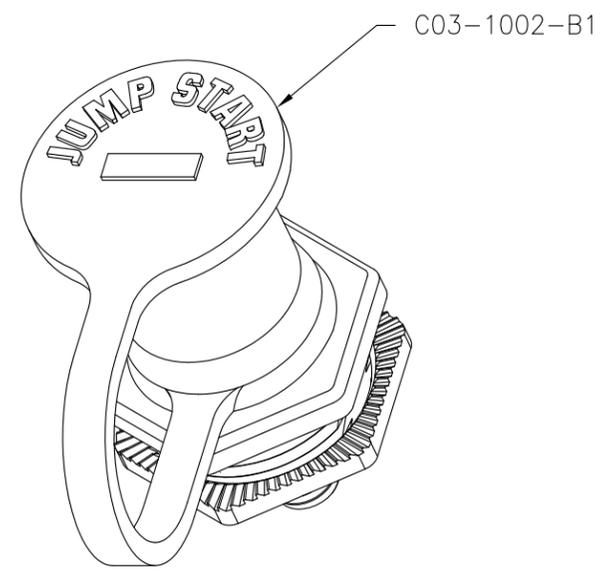
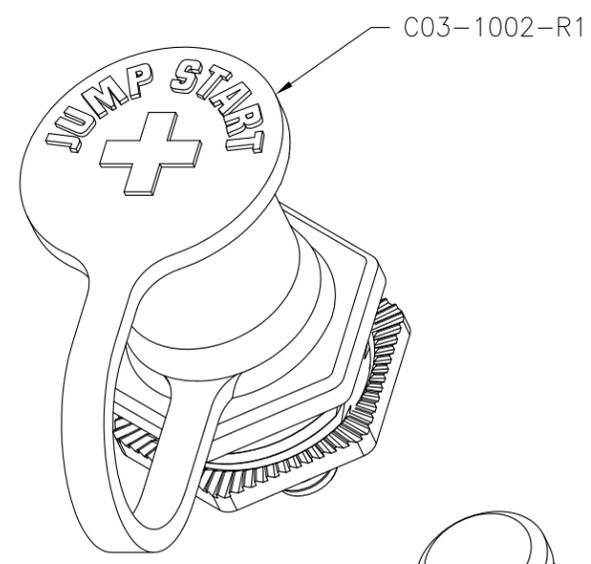


|                     |                 |                                      |            |
|---------------------|-----------------|--------------------------------------|------------|
| PART NO. JSX-38A-15 |                 | TITLE JUMP START (STYLE A) - 3/8"-16 |            |
| CUSTOMER STANDARD   |                 | SCALE 1:1                            |            |
| ENGLISH (in)        | SCALE 1:1       |                                      |            |
| REV #               | REVISION        | DATE                                 | BY APPROVE |
| 0                   | INITIAL RELEASE | 02-18<br>2014                        | RR KS      |

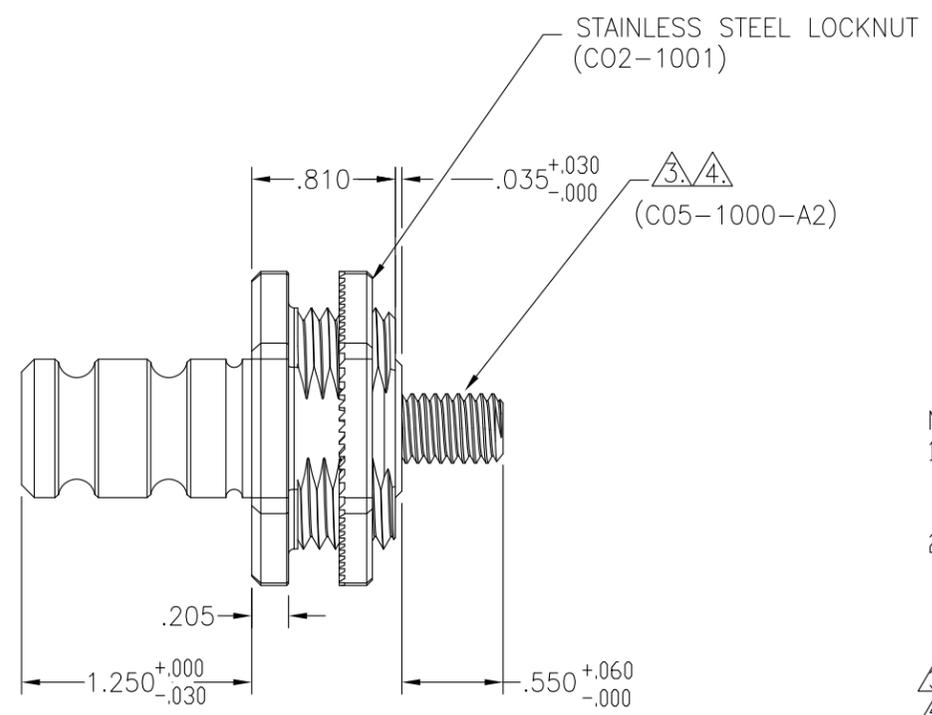

ISO. VIEWS FOR REF. ONLY

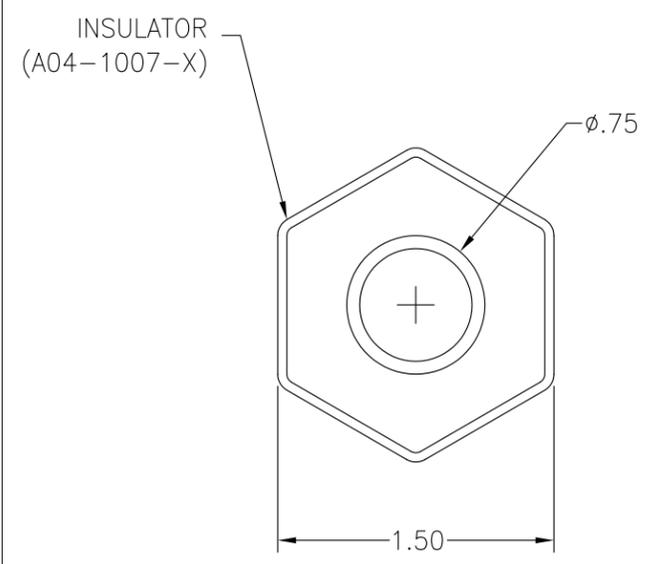

- NOTES:
- MATERIAL: STUD - SUS304 OR EQUIVALENT STAINLESS STEEL  
CORE - H65 OR EQUIVALENT BRASS  
INSULATOR - DUPONT ZYTEL 70G33L OR EQUIVALENT.
  - COLOR TO BE ADDED BY MOLDER, AND TO REMAIN CONSISTENT FROM RUN TO RUN:  
JSB-38A-15 - BLACK/WITH (-) NEGATIVE BOOT  
JSR-38A-15 - RED/WITH (+) POSITIVE BOOT (PANTONE 185C)
  - STUD THREAD TYPE 3/8"-16
  - APPLY LOCTITE 277 BEFORE INSTALLATION OF STUD.
  - NET WEIGHT: BRASS CORE & PLASTIC BODY 112.3g, STUD 12.3g, STAINLESS STEEL LOCKNUT 12.9g.

| TOLERANCES UNLESS OTHERWISE SPECIFIED |                 |
|---------------------------------------|-----------------|
| METRIC TOL                            | ENGLISH TOL     |
| 1 PL DEC.=±.25                        | 2 PL DEC.=±.01  |
| 2 PL DEC.=±.13                        | 3 PL DEC.=±.005 |

| THIRD ANGLE PROJECTION                      |
|---|
| ANGULAR TOL= ±2°<br>FRACTION TOL= ± 1/64 IN |